

BOSTMARINE TYPE LSX POWER CABLE

three conductor / LSZH / unarmored & armored
 14 AWG to 1000 MCM / 600V

APPLICATIONS

BOSTMARINE Type LSX 600 volt cables are suitable for use in commercial marine applications where low smoke/zero halogen flame retardant cables having excellent physical and electrical properties are required. The insulation system has a continuous operating temperature of 90°C.

These cables meet all test requirements of IEEE 45 (1998), IEEE 1580 (2001), UL 1309 and the Flame Test in IEC 60332-3, Category A. They are listed by ETL, a nationally recognized testing laboratory, per IEEE 45 (1998), IEEE 1580 (2001) and UL 1309/CSA 245 for 600 volts. Type LSX cables are approved by ABS.

Aluminum and bronze armored versions are available.

Optional outer PVC sheath available upon request.

FEATURES

- IEEE STANDARD 45 (1998)
- IEEE STANDARD 1580 (2001)
- UL 1309/CSA 245 (1995) FIRST EDITION

CONSTRUCTION

1. CONDUCTOR

Soft annealed bare copper per ASTM B 3 and B 8, stranded as shown in table on reverse.

2. INSULATION

Bostmarine Type LSX thermosetting low smoke cross-linked polyethylene meeting specifications IEEE 45 (1998), IEEE-1580 (2001), UL 1309 X90 and J-502. Thickness as shown in tables on the reverse.

3. JACKET

Flame-retardant thermoplastic low smoke polyolefin is applied over the cable core (covered with a polyester separator tape) and complies with Type TPO thermoplastic low smoke polyolefin as required in IEEE 45 (1998) and UL 1309 Type TPE.

RATINGS


Meets all test requirements of IEEE 45 (1998), IEEE 1580 (2001), UL 1309/CSA 245 (1995) First Edition and the Flame Test in IEC 60332-3, Category A.

APPROVALS

ETL/Intertek Testing Services Listed as Marine Shipboard Cable in accordance with IEEE 45 (1998), IEEE 1580 (2001), UL 1309/CSA 245 and the performance requirements of IEC 60092-3 for 0.6/1 kV

American Bureau of Shipping Approval Certificate No. B315003-X.

Manufactured to Draka Cableteq USA Specifying Standard J-502

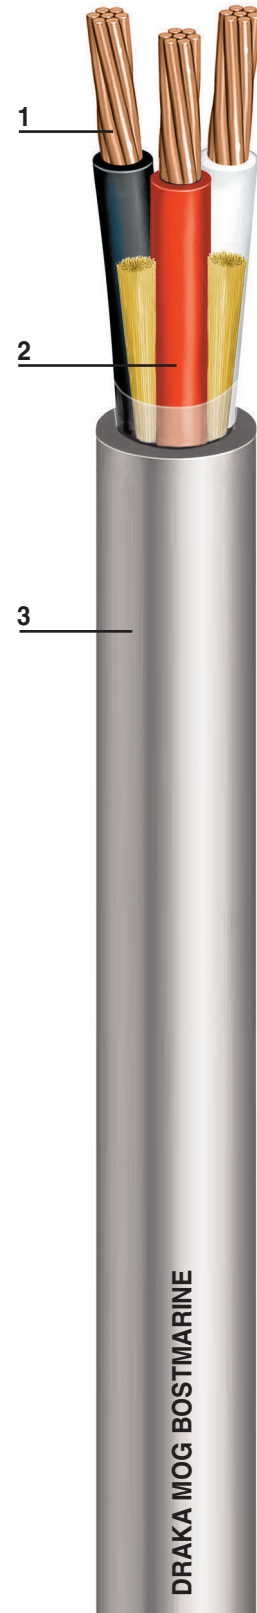

BOSTMARINE TYPE LSX POWER CABLE

three conductor / LSZH / unarmored
14 AWG to 1000 MCM / 600V



| TPC Cable Type | Part Number | Conductor Size | Stranding Type | Insulation Thickness in • mm | Jacket Thickness in • mm | Cable Diameter (nominal) in • mm | Cable Weight (approximate) Lbs/mft • Kg/km |
|----------------|-------------|----------------|----------------|------------------------------|--------------------------|----------------------------------|--|
| TLSXTPO-4 | 036319 | 14 • 2.1 | 7/24.2 | 0.030 • 0.76 | 0.045 • 1.14 | 0.400 • 10.2 | 90 • 134 |
| TLSXTPO-6 | 036320 | 12 • 3.3 | 7/30.5 | 0.030 • 0.76 | 0.045 • 1.14 | 0.440 • 11.2 | 120 • 179 |
| TLSXTPO-10 | 036321 | 10 • 5.3 | 7/38.5 | 0.030 • 0.76 | 0.045 • 1.14 | 0.500 • 12.7 | 170 • 253 |
| TLSXTPO-16 | 036322 | 8 • 8.4 | 7/48.6 | 0.045 • 1.14 | 0.060 • 1.52 | 0.670 • 17.1 | 280 • 417 |
| TLSXTPO-26 | 036323 | 6 • 13.3 | 7/61.2 | 0.045 • 1.14 | 0.060 • 1.52 | 0.750 • 19.1 | 395 • 588 |
| TLSXTPO-41 | 036324 | 4 • 21.1 | 7/77.2 | 0.045 • 1.14 | 0.080 • 2.03 | 0.900 • 23.0 | 570 • 848 |
| TLSXTPO-66 | 036325 | 2 • 33.6 | 7/97.4 | 0.045 • 1.14 | 0.080 • 2.03 | 1.030 • 26.2 | 875 • 1302 |
| TLSXTPO-83 | 036326 | 1 • 42.4 | 19/66.4 | 0.055 • 1.40 | 0.080 • 2.03 | 1.160 • 29.5 | 1090 • 1622 |
| TLSXTPO-106 | 036327 | 1/0 • 53.5 | 19/74.5 | 0.055 • 1.40 | 0.080 • 2.03 | 1.255 • 31.9 | 1320 • 1964 |
| TLSXTPO-133 | 036328 | 2/0 • 67.4 | 19/83.7 | 0.055 • 1.40 | 0.080 • 2.03 | 1.355 • 34.4 | 1615 • 2403 |
| TLSXTPO-168 | 036329 | 3/0 • 85.0 | 19/94.0 | 0.055 • 1.40 | 0.080 • 2.03 | 1.470 • 37.3 | 1980 • 2947 |
| TLSXTPO-212 | 036330 | 4/0 • 107.2 | 19/105.5 | 0.055 • 1.40 | 0.080 • 2.03 | 1.595 • 40.5 | 2435 • 3624 |
| TLSXTPO-250 | 036331 | 250 • 127.0 | 37/82.2 | 0.065 • 1.65 | 0.110 • 2.79 | 1.810 • 46.0 | 2965 • 4412 |
| TLSXTPO-300 | 036332 | 300 • 152.0 | 37/90.0 | 0.065 • 1.65 | 0.110 • 2.79 | 1.930 • 49.0 | 3485 • 5186 |
| TLSXTPO-350 | 036333 | 350 • 177.0 | 37/97.3 | 0.065 • 1.65 | 0.110 • 2.79 | 2.040 • 51.8 | 4005 • 5960 |
| TLSXTPO-400 | 036334 | 400 • 203.0 | 37/104.0 | 0.065 • 1.65 | 0.110 • 2.79 | 2.140 • 54.4 | 4525 • 6734 |
| TLSXTPO-500 | 036335 | 500 • 253.0 | 37/116.2 | 0.065 • 1.65 | 0.110 • 2.79 | 2.330 • 59.2 | 5545 • 8252 |
| TLSXTPO-750 | 036336 | 750 • 380.0 | 61/110.9 | 0.080 • 2.03 | 0.140 • 3.56 | 2.865 • 72.8 | 8420 • 12530 |
| TLSXTPO-1000 | 036337 | 1000 • 507.0 | 61/128.0 | 0.080 • 2.03 | 0.140 • 3.56 | 3.200 • 81.3 | 11000 • 16370 |

three conductor / LSZH / aluminum and bronze armored
14 AWG to 1000 MCM / 600V

| TPC Cable Type | Part Number* | Conductor Size | Stranding Type | Insulation Thickness in • mm | Jacket Thickness in • mm | Armored Cable Diameter in • mm | Aluminum arm. Cable Weight Lbs/mft • Kg/km | Bronze arm. Cable Weight Lbs/mft • Kg/km |
|----------------|--------------|----------------|----------------|------------------------------|--------------------------|--------------------------------|--|--|
| TLSXTPO-4 | 036319 | 14 • 2.1 | 7/24.2 | 0.030 • 0.76 | 0.045 • 1.14 | 0.455 • 11.3 | 115 • 171 | 171 • 254 |
| TLSXTPO-6 | 036320 | 12 • 3.3 | 7/30.5 | 0.030 • 0.76 | 0.045 • 1.14 | 0.495 • 12.6 | 147 • 219 | 209 • 311 |
| TLSXTPO-10 | 036321 | 10 • 5.3 | 7/38.5 | 0.030 • 0.76 | 0.045 • 1.14 | 0.555 • 14.1 | 200 • 298 | 270 • 402 |
| TLSXTPO-16 | 036322 | 8 • 8.4 | 7/48.6 | 0.045 • 1.14 | 0.060 • 1.52 | 0.725 • 18.4 | 320 • 476 | 413 • 615 |
| TLSXTPO-26 | 036323 | 6 • 13.3 | 7/61.2 | 0.045 • 1.14 | 0.060 • 1.52 | 0.805 • 20.4 | 440 • 655 | 543 • 808 |
| TLSXTPO-41 | 036324 | 4 • 21.1 | 7/77.2 | 0.045 • 1.14 | 0.080 • 2.03 | 0.955 • 24.3 | 623 • 927 | 746 • 1110 |
| TLSXTPO-66 | 036325 | 2 • 33.6 | 7/97.4 | 0.045 • 1.14 | 0.080 • 2.03 | 1.085 • 27.6 | 936 • 1393 | 1076 • 1601 |
| TLSXTPO-83 | 036326 | 1 • 42.4 | 19/66.4 | 0.055 • 1.40 | 0.080 • 2.03 | 1.215 • 30.9 | 1158 • 1732 | 1316 • 1958 |
| TLSXTPO-106 | 036327 | 1/0 • 53.5 | 19/74.5 | 0.055 • 1.40 | 0.080 • 2.03 | 1.310 • 33.3 | 1394 • 2074 | 1564 • 2327 |
| TLSXTPO-133 | 036328 | 2/0 • 67.4 | 19/83.7 | 0.055 • 1.40 | 0.080 • 2.03 | 1.410 • 35.8 | 1694 • 2521 | 1878 • 2794 |
| TLSXTPO-168 | 036329 | 3/0 • 85.0 | 19/94.0 | 0.055 • 1.40 | 0.080 • 2.03 | 1.525 • 38.7 | 2066 • 3074 | 2265 • 3370 |
| TLSXTPO-212 | 036330 | 4/0 • 107.2 | 19/105.5 | 0.055 • 1.40 | 0.080 • 2.03 | 1.650 • 41.9 | 2528 • 3762 | 2743 • 4082 |
| TLSXTPO-250 | 036331 | 250 • 127.0 | 37/82.2 | 0.065 • 1.65 | 0.110 • 2.79 | 1.865 • 47.4 | 3070 • 4568 | 3314 • 4931 |
| TLSXTPO-300 | 036332 | 300 • 152.0 | 37/90.0 | 0.065 • 1.65 | 0.110 • 2.79 | 1.985 • 50.4 | 3597 • 5352 | 3857 • 5739 |
| TLSXTPO-350 | 036333 | 350 • 177.0 | 37/97.3 | 0.065 • 1.65 | 0.110 • 2.79 | 2.095 • 53.2 | 4124 • 6137 | 4398 • 6544 |
| TLSXTPO-400 | 036334 | 400 • 203.0 | 37/104.0 | 0.065 • 1.65 | 0.110 • 2.79 | 2.195 • 55.8 | 4649 • 6918 | 4937 • 7346 |
| TLSXTPO-500 | 036335 | 500 • 253.0 | 37/116.2 | 0.065 • 1.65 | 0.110 • 2.79 | 2.385 • 60.6 | 5680 • 8452 | 5993 • 8918 |
| TLSXTPO-750 | 036336 | 750 • 380.0 | 61/110.9 | 0.080 • 2.03 | 0.140 • 3.56 | 2.920 • 74.2 | 8586 • 12776 | 8969 • 13346 |
| TLSXTPO-1000 | 036337 | 1000 • 507.0 | 61/128.0 | 0.080 • 2.03 | 0.140 • 3.56 | 3.255 • 82.7 | 11185 • 16643 | 11613 • 17280 |

*NOTE: For aluminum armored versions, add an A (ex. 036299A). For bronze armored versions, add a B (ex. 036299B).

This information is provided for reference only, please consult the factory or your representative to confirm all engineering information.

This information is not meant to replace the information in the appropriate and applicable standard or code.