


Instrumentation and communication cables

HXXMB EEP 0.6/1 kV IEC 60092-3

Individually shielded and isolated*

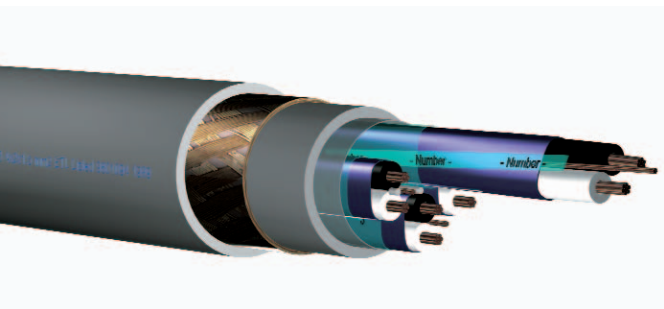

Application:

Armored, individually shielded and isolated instrumentation and communication cables 0.6/1 kV with special properties for electrical installations in ships and offshore units. Temperature Class 85 °C, Flame Retardant (IEC 60332-3 category "A", "A/F"), Low Smoke, Halogen Free, Low Toxicity. Suitable for application in cold climate areas required to pass cold bend and cold impact testing at -40 °C and -35 °C, respectively.

Construction:

According to IEC 60092-3 with enhanced properties.

Conductors:	stranded bare annealed copper, IEC 60228, sizes 1 - 4 mm ²
Insulation:	cross linked polyethylene (XLPE/ HF XLPE) according to IEC 60092-3, IEC 60092-351 and IEEE Std 45
Twisting:	cores twisted to a pair/triad
Individual shield and isolation:	tinned copper drain wire; aluminum/polyester tape; polyester tape
Assembly:	shielded pairs/triads cabled together
Innersheath:	halogen free, flame retardant (SHF1, IEC 60092-359)
Braiding:	bronze wires according to IEEE Std 45, CDA 220, weight coverage 90% on nominal diameter according to IEC 60092-3, wire diameter 0.32 - 0.40 mm
28 Sheathing:	halogen free, flame retardant (SHF1, IEC 60092-359); all sheath and jacketing materials shall pass tear resistance testing to 35 lbs/in (6.4 N/mm)
Sheathing color:	gray (other colors are available on request)

Identification of the groups:

1 pair	black, white
multi pairs	black, white (groups sequential cores numbered 1-1, 2-2, 3-3 etc.)
1 triad	black, white, red
multi triads	black, white, red (groups sequential cores numbered 1-1-1, 2-2-2, 3-3-3, etc.)

Special cable properties:

Fire propagation:	IEC 60332-3 category "A", "A/F"
Smoke:	IEC 61034-1/2, MIL-C-24643A (par. 4.7.27) and NES 711
Acidity:	IEC 60754-1/2 and MIL-C-24643A (par. 4.7.25)
Halogen content:	IEC 60754-1/2 and MIL-C-24643A (par. 4.7.26)
Toxicity index:	NES 713
Cold properties:	cold bend (-40 °C) and cold impact (-35 °C) according to CAN/CSA-C22.2 No. 0.3-Dec. '92
*Remark:	Other constructions available on request

General data for HXXMB Individually shielded and isolated EEP 0.6/1 kV IEC 60092-3

number of cores and nominal cross sectional area (n x mm ²)	number of wires in conductor class 2 (n)	nominal conductor diameter (mm)	nominal core diameter (mm)	nominal diameter over inner-sheath (inches)	nominal diameter over inner-sheath (mm)	nominal diameter of braiding wire (mm)	nominal outer diameter (inches)	nominal outer diameter (mm)	minimum bending radius (mm)	approximate weight (lbs/M')	approximate weight (kg/km)	conductor resistance at 20 °C DC (Ω/M')	conductor resistance at 20 °C DC (Ω/km)
1 x 2 x 1	7	1.3	3.1	0.350	8.9	0.32	0.500	12.7	76	161	240	5.6	18.5
2 x 2 x 1	7	1.3	3.1	0.567	14.4	0.32	0.728	18.5	111	323	480	5.6	18.5
4 x 2 x 1	7	1.3	3.1	0.673	17.1	0.32	0.843	21.4	128	383	570	5.6	18.5
10 x 2 x 1	7	1.3	3.1	0.984	25.0	0.32	1.177	29.9	179	766	1,140	5.6	18.5
12 x 2 x 1	7	1.3	3.1	1.047	26.6	0.32	1.240	31.5	189	806	1,200	5.6	18.5
16 x 2 x 1	7	1.3	3.1	1.185	30.1	0.32	1.386	35.2	211	1,008	1,500	5.6	18.5
1 x 2 x 1.5	7	1.6	3.4	0.370	9.4	0.32	0.524	13.3	80	148	220	3.7	12.3
2 x 2 x 1.5	7	1.6	3.4	0.606	15.4	0.32	0.768	19.5	117	363	540	3.7	12.3
5 x 2 x 1.5	7	1.6	3.4	0.799	20.3	0.32	0.969	25.7	148	484	720	3.7	12.3
12 x 2 x 1.5	7	1.6	3.4	1.130	28.7	0.32	1.331	33.8	203	927	1,380	3.7	12.3
12 x 2 x 2.5	7	2.0	3.8	1.272	32.3	0.40	1.484	37.7	226	1,075	1,600	2.30	7.56
2 x 2 x 4	7	2.5	4.6	0.787	20.0	0.32	0.957	24.3	146	491	730	1.43	4.70
1 x 3 x 1	7	1.3	3.1	0.370	9.4	0.32	0.524	13.3	80	343	510	5.6	18.5
1 x 3 x 1.5	7	1.6	3.4	0.394	10.0	0.32	0.543	13.8	83	349	520	3.7	12.3
10 x 3 x 1.5	7	1.6	3.4	1.240	31.5	0.40	1.453	36.9	221	1,062	1,580	3.7	12.3
16 x 3 x 1.5	7	1.6	3.4	1.499	36.8	0.40	1.677	42.6	256	1,378	2,050	3.7	12.3

Electrical characteristics for HXXMB Individually shielded and isolated EEP 0.6/1 kV IEC 60092-3

cross section of the conductor (mm ²)	mutual capacitance core to core (nF/M') pair & triad	mutual capacitance core to core (nF/km) pair & triad	mutual capacitance core to shield (nF/M') pair & triad	mutual capacitance core to shield (nF/km) pair & triad	loop inductance (mH/M') pair & triad	loop inductance (mH/km) pair & triad
1	19	63	33	108	0.22	0.72
1.5	21	70	37	121	0.21	0.68
2.5	24	79	41	136	0.20	0.64
4	25	82	43	142	0.19	0.62